


Mini-Scout-Mount™ Installation Instructions For RUGER® 10/22 Carbine

STEP #1. ****BE POSITIVE THAT YOUR RIFLE IS NOT LOADED!!!!****

1. Treat ALL guns as if they are LOADED.
2. NEVER let the muzzle point at anything you are not willing to destroy.
3. Keep you finger OFF the trigger.
4. REMOVE the magazine completely and set it aside.
5. PULL the bolt handle completely to the REAR and CHECK the chamber.
6. Work the bolt handle several times and check the chamber AGAIN.

STEP #2 REMOVE THE REAR SIGHT & BARREL CLAMP

- Loosen the cross-screw in the original barrel band, and take off the barrel band toward the front.
- Place the rifle on its side on a flat and sturdy table or bench surface. Use a towel or pad to protect the stock from scratching. Position a small brass or plastic punch against the base of the rear sight. Use a small hammer to tap the punch and push the rear sight from the dovetail notch in the barrel.

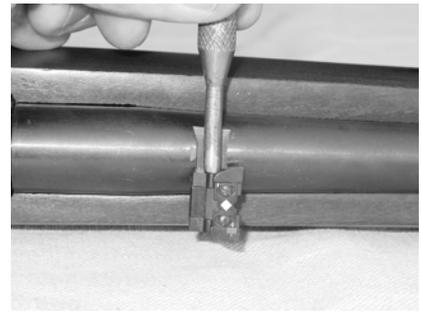

STEP #3 ASSEMBLY

- Slide the new *Barrel Clamp* over the rifle barrel and the front of the carbine stock to the position where the original barrel band had been. Insert the 8-32 Cap head screw through the flange of the *Barrel Clamp* and start it into the threaded side of the flange. DO NOT snug this screw down yet!
- Set the rifle upright on the table and slide the *Dovetail Nut* into the dovetail notch in the barrel where the rear sight had been.
- Set the *Mount Body* on top of the barrel so that it fits over the *Barrel Clamp* and the *Dovetail Nut*.
- Insert the two 8-32 flat-head socket screws through the holes in the top of the *Mount Body* and start them into the threaded holes in the top of the *Barrel Clamp* and the *Dovetail Nut*. DO NOT snug these screws down yet!
- Snug down the top screw holding the *Mount Body* and *Barrel Clamp* together, using the hex wrench provided.
- Now snug down the Cap Head screw pulling the flanges of the *Barrel Clamp* together.
- Looking down on the rear of the *Mount Body*, align it with the sides of the receiver so it is centered over the barrel. Now snug down the screw holding the *Mount Body* and the *Dovetail Nut* together.



TIPS & TROUBLE SHOOTING

- Our *Tactical Light Mount Kit* provides a convenient mounting surface for tactical flashlights, IR illuminators, and even an additional laser sight or red-dot sight. Larger flashlights can be mounted with quick-detachable 30mm scope rings. There are three different styles of *Tactical Light Mount Kit* to choose from.
- We recommend the use of “Pistol” scopes, mounted in the lowest rings that will fit the scope on the mount. These offer many advantages, such as longer eye relief, balance, etc. Red-dot sights can be mounted anywhere along the Picatinny rail to suit the shooter’s preference.
- **If you have any problems with the fit or function, break or lose a part, just call or email us.**



Other models of Mini-Scout-Mount™ available;

- Ruger® Mini-14 with original barrel profile (180 series through 2007).
- Ruger® Mini-14 GB or AC556 with factory folding stock and side-mounted front sling swivel.
- NEW Ruger® Mini-14 with heavier “flanged” barrel, 580 series introduced in late 2007 for the Mini-14 Target, 6.8spc, new Mini-30, NRA Model, etc.
- M1-Garand with Mil-Std barrel.
- M1-Carbine with Mil-Std barrel.
- Ruger® 10-22 Carbine.
- Remington® 870, both plain and vent-rib models.
- M14/M1A - Bush/SOCOM and Standard Mil-Std barrel models.
- *Tactical Light Mount Kit* – Standard for Glock or Weaver style mountings.
- *Tactical Light Mount Kit*- 1913 Picatinny style mountings.
- *Tactical Light Mount Kit*- 1913 LONG Picatinny style for mounting larger units.

MEGA RANGES, INC.
6355 Stinson Street #202
Plano, TX 75093

www.amegaranges.com
office: 623-748-9011
customersvc@amegaranges.com

Get on ‘em *FAST* with a *Mini-Scout-Mount*™!